



## Fabric Covered Dressing Bench

Copyright © 2015 Sawdust to Sequins

### Tools

Saw to cut boards to length

Drill

Pocket Hole Jig

Sander for finishing wood

Stapler to attach fabric to board

# Supplies

2 ½" Pocket Hole Screws

Fabric to cover 18"X48" board

Paint or stain of choice

Staples

Foam backing for bench seat


Adhesive for foam

## Cut List



SAWDUST to *Sequins*

# Pocket Hole Placement

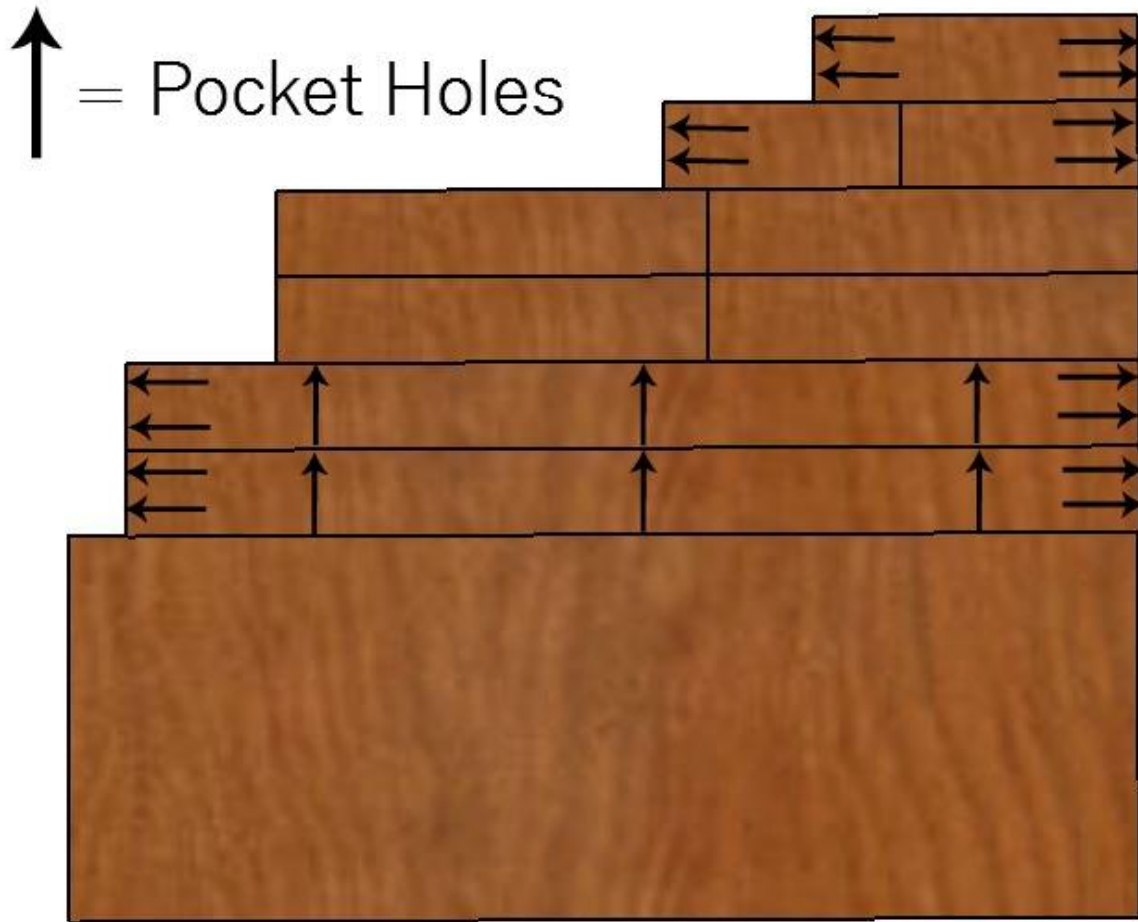


SAWDUST to *Sequins*

## Step 1

Cut boards to length and drill pocket holes according to cut list and pocket hole placement picture.

## Step 2


Attach middle support (48" board) to two 20" legs with pocket hole screws. Repeat for other leg section.

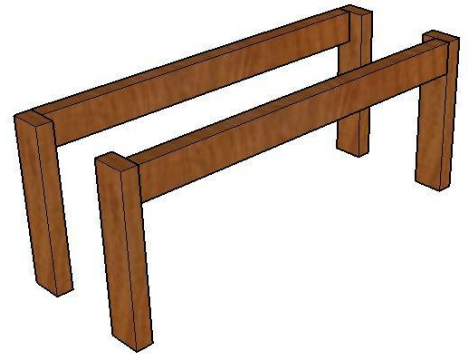

SAWDUST to *Sequins*

## Step 3

Attach the two end supports (11")  
And the middle support (15") to the leg sections with pocket hole screws.

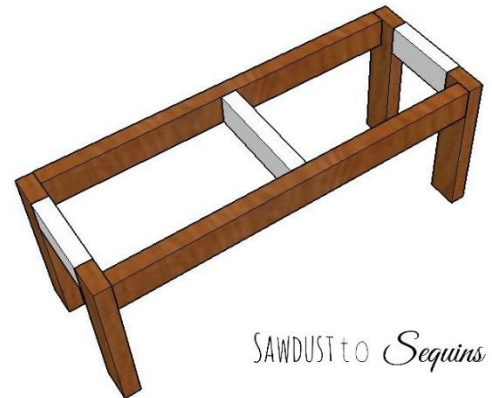

SAWDUST to *Sequins*

## Step 4

Use adhesive to attach foam backing to the 18"X48" piece of plywood. Lay fabric over the foam and flip over.



SAWDUST to *Sequins*

## Step 5

Pull the fabric tight and attach to the wood using a stapler. Place several staples on each side of the bench seat.



*SAWDUST to Sequins*

## Step 6

Sand completely. Paint or stain the bench bottom before attaching the top to avoid staining the fabric.

## Step 7

Once the paint or stain is dry, attach the top with pocket hole screws. The holes will be in the middle support boards.



*SAWDUST to Sequins*

Have fun with this build and follow me @ [SawdusttoSequins.com](https://www.sawdusttosequins.com) for more plans!!

Follow along on [Pinterest](#) and [Instagram](#) for my latest projects and behind the scenes pics of my builds.